
VOYGAR
QUALITY IS OUR CONCERN

Cat.6A STP Field Terminable Plug, 180 Deg. Die casting

Ref. DTA45P6AS

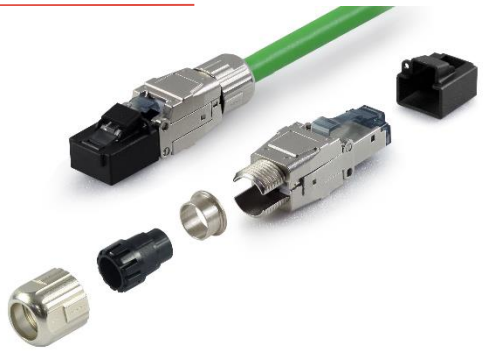

Applications

MPTL
Industrial
Enterprise


Specifications

Insulation Resistance	500 Mohms minimum
Contact Resistance	20 mohms maximum
Durability	1000 mating cycles.
Cable to Plug Tensile Strength	20 lbs (89N) min.
Temperature	-40°C to 68°C
IDC-Contact	T=0.4mm phosphor bronze, Sn over nickel plating.
Accept Cable	26~23AWG solid wire. Outer diameter 6.0~8.5

Standards

Qualified Screened Cat.6A Connecting Hardware
TIA-568.2-D
IEC60603-7-51
ISO/IEC11801 2.2 Edition
CENELEC EN 50173-1
PoE+ type I & II
IEEE 802.3at
IEC 60512-99-001 (2012-08)
IEC 60512-9-3 (2011-06)

Drawing

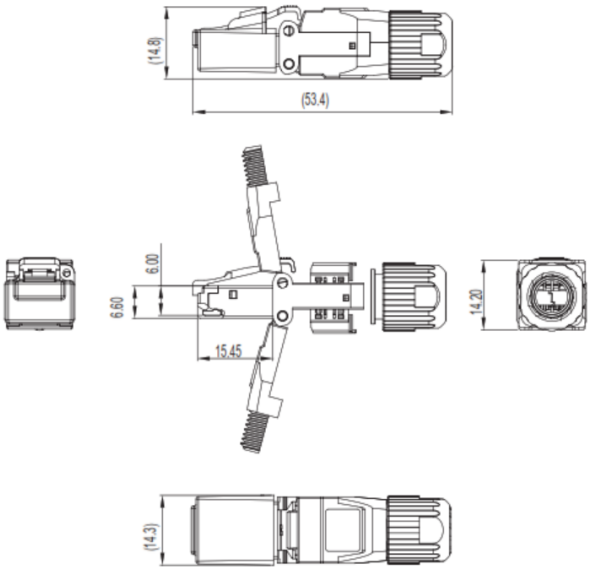

Stresemannstraße 23
10963 Berlin

Tel. 030 65774162
Fax. 030 700143-1359

E-mail: info@voygar.de
www.voygar.com