

HDPE High Strength Microduct Tube Bundle Direct Buried 1-12ways 8/6mm



DIRECT BURY HIGH STRENGTH duct is designed for high crush resistance from external pressure. The thin inner tube wall can make it easy to bend or fix inside of cabinet/closure. The extra layer (total 2 layers of the outer sheath) is added to protect the thin wall of inner tube from external ground pressure. Flexibility of tube allows bending or fixing inside of cabinet/closure. It is strong against lightning, electrical surge.



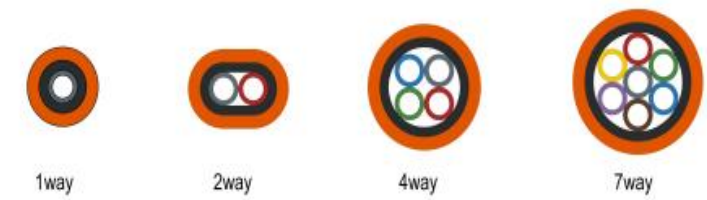

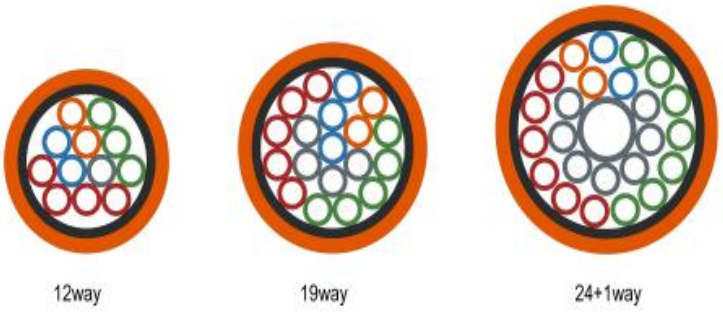



Optional Features

- Wide range of number of inner tube from 1 way to 24+1 way
- Ribbed & Smooth Type
- Rip cords
- Insulated Locatable copper wire

Stresemannstraße 23
10963 Berlin
Tel. 030 65774162
Fax. 030 700143-1359
E-mail: info@voygar.de
www.voygar.com

SPECIFICATION

8/6mm	OD max inch	OD min inch	Sheath Thickness(Inch)	Weight (lbs)	Supported BR (In)	Unsupported BR (in)	Safe Working Pull Strength lbs
1Way	0.59	0.59	0.1365	0.094	6	12	485
2Way	0.91	0.59	0.1365	0.144	9	12	742
4Way	1.04	1.04	0.1365	0.215	10	21	1109
7Way	1.22	1.22	0.1365	0.289	12	24	1494
12Way	1.59	1.59	0.156	0.457	16	32	2357

CONSTRUCTION

INNER TUBES	Materials	HDPE (High-density Polyethylene)
	Diameter	5.9- 6.1mm
	Color options	Fully colored
	Inner surface	Smooth with silicon 0.1mm
OUTER SHEATH	Materials	HDPE (High-density Polyethylene)
	Color	Orange, or customized
	Diameter	7.9- 8.1mm
	Wall thickness(mm)	0.9mm

Storage

Completed packages of the HDPE Tube Bundle on drums can be stored outdoor max. 6 months upon the date of production.

Storage temperature	-40°C ～+70°C
Installation temperature	-20°C ～+50°C
Operating temperature	-40°C ～+70°C

Mechanical Performance Test compliance

Tensile Strength	IEC 60794-1-2 Method E1
Bend	IEC 60794-1-2 Method E11
Kink	IEC 60794-1-2 Method E10
Impact	IEC 60794-1-2 Method E4
Crush	IEC 60794-1-2 Method E3
Compliant to	Telcordia GR 3155-CORE

VOYGAR SYSTEMS GmbH has met and maintains the rigorous standards required to become a Certified ISO 9001, ISO 14001.
VOYGAR SYSTEMS GmbH Micro duct Assemblies has been rigorously tested by Telcordia Technologies and found to be compliant to Telcordia GR-3155-CORE.

Ordering Information

P.N	DESCRIPTION
HBHS8601	HDPE High Strength Microduct Tube Bundle Direct Buried 1-ways 8/6mm
HBHS8602	HDPE High Strength Microduct Tube Bundle Direct Buried 2-ways 8/6mm
HBHS8604	HDPE High Strength Microduct Tube Bundle Direct Buried 4-ways 8/6mm
HBHS8607	HDPE High Strength Microduct Tube Bundle Direct Buried 7-ways 8/6mm
HBHS8612	HDPE High Strength Microduct Tube Bundle Direct Buried 12-ways 8/6mm

Stresemannstraße 23
10963 Berlin
Tel. 030 65774162
Fax. 030 700143-1359
E-mail: info@voygar.de
www.voygar.com