VOYGAR
QUALITY IS OUR CONCERN

Floor standing optical distribution frame cabinet up to 144 core capacity

Ref. OD8E144



Outdoor floor type fiber optic distribution frame is mainly used for connecting the outdoor optical cables, optical patch cords and optical pigtails.
It can be wall mounted or pole mounted, and facilitates the test and refit of the lines.

Features

- High intensity and anti-erosion performance
- Able to counter abrupt climate change and extreme environment
- Capacity can be flexibly customized as required
- Installation is quick and convenient
- Built-in direct splice unit is capable for providing direct connection function.
- Perfect design of fiber wiring routing could facilitate management and maintenance of fibers
- With secure and reliable fastening and grounding protection devices for the optic fiber
- Applicable to strap-shaped and non-strap shaped fibers


Specifications

Rack Mounting	19" Racks
Max Capacity	144
Fiber Optic Mode	SM, OM1, OM2, OM3 or OM4
Nominal work wave-length	850nm, 1310nm, 1550nm
Protection level	IP65
Work Temperature	-45℃-+85℃
Relative humidity	≤85%(+30℃)
Atmospheric pressure	70~106 KPa
Insertion loss	≤0.2dB
Return loss	≥45dB (PC),55dB(UPC),60dB(APC)
Isolation resistance	＞1000 MΩ/500V(DC)

Dimensions and Capability

Dimensions (W*H*D)	525 x 900 x 280 mm

Stresemannstraße 23
10963 Berlin
Tel. 030 65774162
Fax. 030 700143-1359
E-mail: info@voygar.de
www.voygar.com

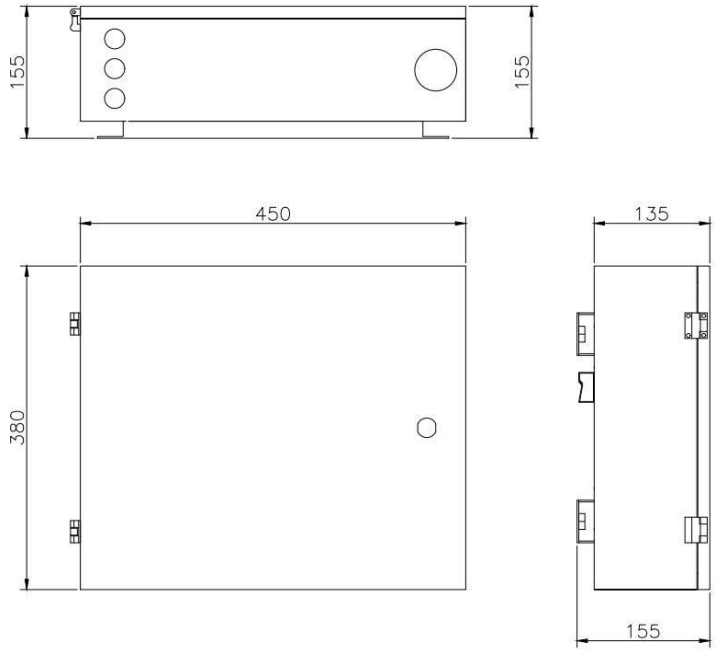

Stresemannstraße 23
10963 Berlin
Tel. 030 65774162
Fax. 030 700143-1359
E-mail: info@voygar.de
www.voygar.com