VOYGAR
QUALITY IS OUR CONCERN

3U, Fiber Panel High Density, accepts 12 fiber Modules /MPO

Ref. PHD3SL12



This Fiber Distribution Panel is 3U and fits in a standard 19" rack or enclosure. It has 12 adapter panel ports that can fit up to 288 fibers with 12x Quad LC fiber adapter panels. This fiber panel is designed to support both patching and splicing in one distribution panel and includes trays & spools. The distribution panel has a slide out master panel with an integrated tray stop to prevent overextension of fiber cables. The distribution panel also has a two piece top and a latch door to allow for easy access to the adapter panel.

Features

Modular structure with plug-in splice, patch and MTP/LC conversion modules
Lightweight aluminum/sheet steel construction
Easy and time-saving installation
Various type of rear and side cable entry options
Powder-coated RAL 9000 (Black)
Operating temperature: -20°C / +80°C

General Specifications


Rack Unit Size	3U
Rack Mounting	19" Racks
Finish	Black Powder Coat Paint
Max Capacity	288
Modular Adapter Panel Capacity	12 Module
Operating Temperature	-20℃ -- +80℃

Dimensions and Capability

Dimensions (W*H*D)	483 x 244 x 135mm
Fiber Optic Mode	SM, OM1, OM2, OM3 or OM4

Stresemannstraße 23
10963 Berlin
Tel. 030 65774162
Fax. 030 700143-1359
E-mail: info@voygar.de
www.voygar.com

Drawing

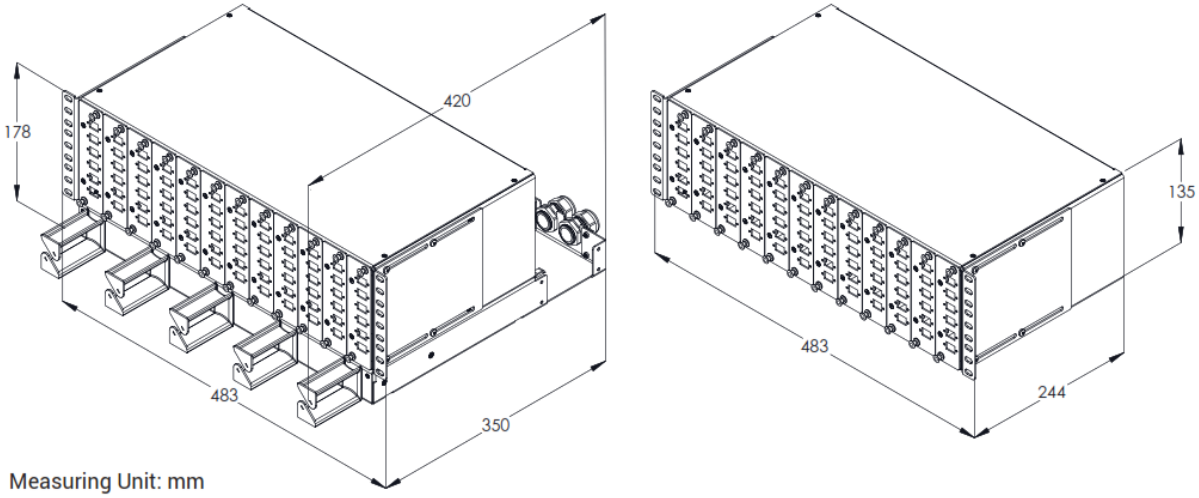

Measuring Unit: mm

Application

Telecommunications
Fiber to the home (FTTH)
Applicable for fiber termination, protection and distribution

Regulatory Compliance/Certifications

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system
Flammability rating UL94 V-0
100% Compatible to Bellcore GR-326 standards
ROHS Compliant

Stresemannstraße 23
10963 Berlin
Tel. 030 65774162
Fax. 030 700143-1359
E-mail: info@voygar.de
www.voygar.com